

Circuit Breakers

For I-LINE® Panelboards and Switchboards
Class 660, 665, 670, 830

Square D
www.squared.com
FOR CURRENT INFORMATION



LI36600
2- and 3-pole
7.5 in (190 mm)
Mounting Height



LC
2- and 3-pole
7.5 in (190 mm)
Mounting Height



MA, MH
2- and 3-Pole
9 in (229 mm)
Mounting Height



NA, NC
2- and 3-Pole
15 in (381 mm)
Mounting Height

L Frame – 400 A, Thermal-Magnetic (600 Vac)

Continuous Current Rating @ 40° C	AC Magnetic Trip Settings▲		Standard Interrupting		High Interrupting		Terminal Wire Range
	Low	High	Catalog Number	Price	Catalog Number	Price	
2-Pole, 600 Vac, 250 Vdc★							
125	625	1250	LA26125()	\$2573.	LH26125()	\$4293.	AL400LA 1-#1 AWG-600 kcmil or 2-#1 AWG-250 kcmil
150	750	1500	LA26150()	2573.	LH26150()	4293.	
175	875	1750	LA26175()	2573.	LH26175()	4293.	
200	1000	2000	LA26200()	2573.	LH26200()	4293.	
225	1125	2250	LA26225()	2573.	LH26225()	4293.	
250	1250	2500	LA26250()	2573.	LH26250()	4293.	
300	1500	3000	LA26300()	2573.	LH26300()	4293.	
350	1750	3500	LA26350()	2573.	LH26350()	4293.	
400	2000	4000	LA26400()	2573.	LH26400()	4293.	
3-Pole, 600 Vac, 250 Vdc							
125	625	1250	LA36125	\$3139.	LH36125	\$5171.	AL400LA 1-#1 AWG-600 kcmil or 2-#1 AWG-250 kcmil
150	750	1500	LA36150	3139.	LH36150	5171.	
175	875	1750	LA36175	3139.	LH36175	5171.	
200	1000	2000	LA36200	3139.	LH36200	5171.	
225	1125	2250	LA36225	3139.	LH36225	5171.	
250	1250	2500	LA36250	3139.	LH36250	5171.	
300	1500	3000	LA36300	3139.	LH36300	5171.	
350	1750	3500	LA36350	3139.	LH36350	5171.	
400	2000	4000	LA36400	3139.	LH36400	5171.	

L Frame – 600 A, Thermal-Magnetic (600 Vac)

Continuous Current Rating @ 40° C	AC Magnetic Trip Settings▲		Extra High Interrupting■		Current Limiting		Terminal Wire Range
	Low	High	Catalog Number	Price	Catalog Number	Price	
2-Pole, 600 Vac★							
300	1500	3000	LC26300()	\$5277.	LI26300()	\$6071.	AL600LI5 2-#4/0 AWG-500 kcmil
350	1750	3500	LC26350()	5277.	LI26350()	6071.	
400	2000	4000	LC26400()	5277.	LI26400()	6071.	
450	2250	4500	LC26450()	5518.	LI26450()	8856.	
500	2500	5000	LC26500()	5518.	LI26500()	8856.	
600	3000	5400	LC26600()	5518.	LI26600()	8856.	
3-Pole, 600 Vac							
300	1500	3000	LC36300	\$5863.	LI36300	\$6776.	AL600LI5 2-#4/0 AWG-500 kcmil
350	1750	3500	LC36350	5863.	LI36350	6776.	
400	2000	4000	LC36400	5863.	LI36400	6776.	
450	2250	4500	LC36450	6131.	LI36450	9840.	
500	2500	5000	LC36500	6131.	LI36500	9840.	
600	3000	5400	LC36600	6131.	LI36600	9840.	

M Frame – 1000 A, Thermal-Magnetic (600 Vac)

Continuous Current Rating @ 40° C	AC Magnetic Trip Settings▲		Standard Interrupting		High Interrupting		Terminal Wire Range
	Low	High	Catalog Number	Price	Catalog Number	Price	
2-Pole, 600 Vac, 250 Vdc★							
300	1500	3000	MA26300()	\$4211.	MH26300()	\$5240.	AL900MA 3-#3/0 AWG-500 kcmil
350	1750	3500	MA26350()	4211.	MH26350()	5240.	
400	2000	4000	MA26400()	4211.	MH26400()	5240.	
450	2250	4500	MA26450()	4211.	MH26450()	5240.	
500	2500	5000	MA26500()	4211.	MH26500()	5240.	
600	3000	6000	MA26600()	4211.	MH26600()	5240.	
700	3500	7000	MA26700()	5314.	MH26700()	6415.	
800	4000	8000	MA26800()	5314.	MH26800()	6415.	
3-Pole, 600 Vac, 250 Vdc							
300	1500	3000	MA36300	\$5186.	MH36300	\$6304.	AL900MA 3-#3/0 AWG-500 kcmil
350	1750	3500	MA36350	5186.	MH36350	6304.	
400	2000	4000	MA36400	5186.	MH36400	6304.	
450	2250	4500	MA36450	5186.	MH36450	6304.	
500	2500	5000	MA36500	5186.	MH36500	6304.	
600	3000	6000	MA36600	5186.	MH36600	6304.	
700	3500	7000	MA36700	6735.	MH36700	8019.	
800	4000	8000	MA36800	6735.	MH36800	8019.	

N Frame – 1200 A, Thermal-Magnetic (600 Vac)

Continuous Current Rating @ 40° C	AC Magnetic Trip Settings▲		Standard Interrupting		Extra High Interrupting		Terminal Wire Range
	Low	High	Catalog Number	Price	Catalog Number	Price	
2-Pole, 600 Vac★							
600	4000	8000	NA26600()	\$11632.	NC26600()	\$13300.	AL1200NE6 4-#3/0 AWG-600 kcmil
700	4000	8000	NA26700()	11632.	NC26700()	13300.	
800	4000	8000	NA26800()	11632.	NC26800()	13300.	
900	5000	10000	NA26900()	11632.	NC26900()	13300.	
1000	5000	10000	NA261000()	11632.	NC261000()	13300.	
1200	5000	10000	NA261200()	11632.	NC261200()	13300.	
3-Pole, 600 Vac							
600	4000	8000	NA36600	\$12700.	NC36600	\$14229.	AL1200NE6 4-#3/0 AWG-600 kcmil
700	4000	8000	NA36700	12700.	NC36700	14229.	
800	4000	8000	NA36800	12700.	NC36800	14229.	
900	5000	10000	NA36900	12700.	NC36900	14229.	
1000	5000	10000	NA361000	12700.	NC361000	14229.	
1200	5000	10000	NA361200	12700.	NC361200	14229.	

- ▲ UL magnetic trip setting tolerances are ±25% (low) and ±20% (high) from nominal values shown.
- Use only in tested and listed enclosures.
- ★ 2-Pole circuit breaker catalog numbers are completed by adding required phase connection letters as suffix to catalog number. See page 8-29.

Interrupting Ratings (kA)

	LA	LH	LC	LI	MA	MH	NA	NC
240 V	42	65	100	200	42	65	100	125
480 V	30	35	65	200	30	65	50	100
600 V	22	25	35	100	22	25	25	65

Accessories.....Pages 6-37-6-39
Optional Lugs.....Pages 6-40, 6-41
Dimensions.....Page 6-45
Enclosures.....Pages 6-47-6-50



Section 6

Molded Case Circuit Breakers



FA



KA



LE



MA



PE



NSJ

Selection Guide	6-2
------------------------	------------

POWERPACT® Electronic Trip Circuit Breakers	6-10
--	-------------

POWERPACT Circuit Breakers	6-10
POWERPACT Circuit Breakers with MICROLOGIC® Trip Units	6-13
MAG-GARD® Motor Circuit Protectors	6-17
MICROLOGIC Trip Units – Selection Guide	6-12
MICROLOGIC Trip Units for Field Upgrade	6-17
Accessories	6-18

MASTERPACT® Universal Power Circuit Breakers	6-20
---	-------------

Thermal-Magnetic and Electronic Trip Circuit Breakers	6-21
--	-------------

MAG-GARD Selection Table	6-26
MAG-GARD Motor Circuit Protectors	6-27
Single Motor Branch Circuits – Application Data	6-28
Ground-Fault Protection Equipment	6-29
MICROLOGIC Trip Systems	6-31
MICROLOGIC Circuit Breakers	6-32
EH/EHB Circuit Breakers and GJL Accessories	6-36
Accessories	6-37

Miniature Circuit Breakers	6-42
-----------------------------------	-------------

QOU Unit Mount	6-42
OEM Mounting Bases	6-44

Dimensions/Shipping Weights	6-45
------------------------------------	-------------




Enclosures	6-47
-------------------	-------------

Accessories	6-48
Enclosed Circuit Breakers	6-49
Molded Case Switches	6-50

Merlin Gerin COMPACT® 15-2500 A Molded Case Circuit Breakers	
---	--

- For worldwide application
- Complies with UL489, IEC947-2 and most standards and agreements worldwide
- CE marked
- Marine approvals
- 3 and 4-pole
- Field installable accessories: shunt trip, undervoltage trip, auxiliary switches, alarm switches and motor operators
- Mounting: fixed, plug-in and drawout
- Connection: busbar, cable and rear connections
- Reverse feeding

Pricing Guide: 0600PL9701

	1000A				1200A				1200 A			
												
Breaker Type	MA	MH	MX	ME	NA	NC	NX	NE	PG	PJ	PL	
Number of Poles	2, 3	2,3	3	3	2, 3	2,3	3	3	2,3	2,3	2,3	
Current Range	300–1200	300–1200	450–800	450–800	600–1200	600–1200	600–1200	600–1200	100–1200	100–1200	100–1200	
Interrupting Ratings												
UL/CSA/NOM Rating (kA RMS) (50/60 Hz AC)	240 Vac	42	65	65	65	100	125	125	125	65	100	125
	480Y/277 Vac	30	65	65	65	50	100	100	100	35	65	100
	480 Vac	30	65	65	65	50	100	100	100	35	65	100
	600Y/347 Vac	22	25	25	25	25	65	65	65	18	25	★
DC Ratings	600 Vac	22	25	25	25	25	65	65	65	18	25	★
	250 Vdc	14	14
	500 Vdc ♦	...	20
IEC 947-2 415/240 Vac (Icu/Ics) ☆	30/30	65/33	65/33	65/33	50/25	70/35	70/35	70/35	50/35	65/35	100/50	
IEC 947-2 50/60 Hz	For additional IEC ratings, see Supplemental Digest.											
Special Ratings												
Fed. Specs W-C-375B/GEN	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
HACR (2, 3-Pole)									✓	✓	✓	
Connections/Terminations												
Unit Mount	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
I-LINE	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Rear Connection	✓	✓										
Drawout												
Optional Lugs	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Accessories and Modifications												
Shunt Trip	✓	✓	●	●	✓	✓	✓	✓	✓	✓	✓	
Undervoltage Trip	✓	✓	●	●	✓	✓	✓	✓	✓	✓	✓	
Auxiliary Switches	✓	✓	●	●	✓	✓	✓	✓	✓	✓	✓	
Alarm Switch	✓	✓	●	●	✓	✓	✓	✓	✓	✓	✓	
Motor Operator	✓	✓										
Handle Operators	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Mechanical Interlocks (3-Pole)	■	■										
Handle Padlock Attachment	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Cylinder Lock (3-Pole)	✓	✓							✓	✓	✓	
Optional GF Protection			●	●			●	●	✓	✓	✓	
Trip System Type												
Thermal Magnetic	✓	✓			✓	✓						
Instantaneous Trip (3-Pole)	✓	✓			✓	✓				✓		
Molded Case Switch (Automatic)		✓				✓			✓	✓	✓	
Electronic			✓	✓			✓	✓	✓	✓	✓	
Enclosures (Pages 6-47–6-50)												
General Purpose (NEMA Type 1)	✓	✓	✓	✓								
Raintight (NEMA Type 3R)	✓	✓	✓	✓	✓	✓	✓					
Dusttight (NEMA Type 12)	✓	✓	✓	✓	✓	✓	✓					
Watertight (NEMA Type 4, 4X, 5)	✓	✓	✓	✓								
Explosion Proof (NEMA Type 7, 9)												
Dimensions (3P Unit Mount)	Height IN (mm)	14 (356)		14.75 (375)		12.12 (308)			16.20 (413)			
	Width IN (mm)	9 (229)		9 (229)		15 (381)			8.30 (210)			
	Depth IN (mm)	6.5 (165)		6.5 (165)		8.07 (205)			8.10 (205)			
Pages (Unit Mount)/(I-LINE)	Pages 6-24, 8-32		Pages 6-33, 8-34		Pages 6-25, 8-32		Pages 6-33, 8-34		Pages 6-10, 6-13, 6-15, 8-24, 8-25, 8-26			

NOTE: All circuit breakers on this chart are UL Listed and CSA Certified unless otherwise noted.
 ● Factory installed option only ★ Contact your nearest Square D/Schneider Electric sales office for 600 V ratings.
 ■ Requires breaker with WB suffix. ☆ Dual UL and IEC ratings and CE markings on circuit breakers. For additional IEC ratings, see Supplemental Digest.
 ♦ Ungrounded UPS systems only.

I-LINE is a Registered Trademark of Square D Company or related companies.



Catalog Numbering System for Thermal-Magnetic Molded Case Circuit Breakers

	FA	L	3	6	100	2100
Circuit Breaker Family	FA, FH, FC, FI KA, KH, KC, KI LA, LH, LC, LI MA, MH NA, NC					
	Note: "A" is replaced by letter "H" for high interrupting circuit breaker. "A" is replaced by letter "C" for extra high interrupting circuit breaker. "A" is replaced by the letter "I" for current-limiting circuit breakers.					
No Letter – I-LINE L – Lugs on both ends	F – Terminal pads only (No Lugs) P – Lugs OFF end only					
1 – 1-pole 2 – 2-pole 3 – 3-pole						
2 – 240 Vac 4 – 480 Vac 6 – 600 Vac						
015-1200 – Ampere rating 000M-0000M – Molded case switch (automatic)						
Special Features A, B, C – I-LINE phase connections XXXX – Factory-installed accessories						



KAL/KHL
 2- and 3-pole
 70-250 Amperes



KIL36250

K Frame – 250 A, Thermal-Magnetic (600 Vac)

Continuous Current Rating @ 40° C	AC Magnetic Trip Settings▲		Standard Interrupting		High Interrupting		Current Limiting		Terminal Wire Range
	Low	High	Catalog Number	Price	Catalog Number	Price	Catalog Number	Price	
2-Pole, 600 Vac, 250 Vdc									
70	350	700	KAL26070	\$1315.	KHL26070	\$3072.	AL250KA 1-#4 AWG-350 kcmil
80	400	800	KAL26080	1315.	KHL26080	3072.	
90	450	900	KAL26090	1315.	KHL26090	3072.	
100	500	1000	KAL26100	1315.	KHL26100	3072.	
110	550	1100	KAL26110	1315.	KHL26110	3072.	KIL26110	\$3922.	
125	625	1250	KAL26125	1315.	KHL26125	3072.	KIL26125	3922.	
150	750	1500	KAL26150	1315.	KHL26150	3072.	KIL26150	3922.	
175	875	1750	KAL26175	1315.	KHL26175	3072.	KIL26175	3922.	
200	1000	2000	KAL26200	1315.	KHL26200	3072.	
225	1125	2250	KAL26225	1315.	KHL26225	3072.	
250	1250	2500	KAL26250	2286.	KHL26250	4039.	
200	1000	2000	KIL26200	3922.	
225	1125	2250	KIL26225	3922.	
250	1250	2500	KIL26250	4586.	
3-Pole, 600 Vac, 250 Vdc									
70	350	700	KAL36070	\$1650.	KHL36070	\$3713.	AL250KA 1-#4 AWG-350 kcmil
80	400	800	KAL36080	1650.	KHL36080	3713.	
90	450	900	KAL36090	1650.	KHL36090	3713.	
100	500	1000	KAL36100	1650.	KHL36100	3713.	
110	550	1100	KAL36110	1650.	KHL36110	3713.	KIL36110	\$4923.	
125	625	1250	KAL36125	1650.	KHL36125	3713.	KIL36125	4923.	
150	750	1500	KAL36150	1650.	KHL36150	3713.	KIL36150	4923.	
175	875	1750	KAL36175	1650.	KHL36175	3713.	KIL36175	4923.	
200	1000	2000	KAL36200	1650.	KHL36200	3713.	
225	1125	2250	KAL36225	1650.	KHL36225	3713.	
250	1250	2500	KAL36250	2751.	KHL36250	4824.	
200	1000	2000	KIL36200	4923.	
225	1125	2250	KIL36225	4923.	
250	1250	2500	KIL36250	5766.	

K Frame – 250 A, Thermal-Magnetic (480 Vac)

Continuous Current Rating @ 40° C	AC Magnetic Trip Settings▲		Extra High Interrupting		Terminal Wire Range
	Low	High	Catalog Number	Price	
2-Pole, 480 Vac					
110	550	1100	KCL24110	\$3465.	AL250KA 1-#4 AWG-350 kcmil
125	625	1250	KCL24125	3465.	
150	750	1500	KCL24150	3465.	
175	875	1750	KCL24175	3465.	
200	1000	2000	KCL24200	3465.	AL250KI 1-#1/0 AWG-350 kcmil
225	1125	2250	KCL24225	3465.	
250	1250	2500	KCL24250	4248.	
3-Pole, 480 Vac					
110	550	1100	KCL34110	4331.	AL250KA 1-#4 AWG-350 kcmil
125	625	1250	KCL34125	4331.	
150	750	1500	KCL34150	4331.	
175	875	1750	KCL34175	4331.	
200	1000	2000	KCL34200	4331.	AL250KI 1-#1/0 AWG-350 kcmil
225	1125	2250	KCL34225	4331.	
250	1250	2500	KCL34250	5314.	

▲ UL magnetic trip setting tolerances are ±25% (low) and ±20% (high) from nominal values shown.

Interrupting Ratings (kA)

	KAL	KHL	KCL	KIL
240 V	42	65	100	200
480 V	25	35	65	200
600 V	22	25	...	100

Accessories Pages 6-37–6-39
 Optional Lugs Pages 6-40, 6-41
 Dimensions Page 6-45, 6-46
 Enclosures Pages 6-47–6-50

I-LINE is a Registered Trademark of Square D Company or related companies.






NAL/NCL
 Two- and Three-Pole
 600-1200 Amperes




PAF/PHF
 Two- and Three-Pole
 600-2000 Amperes



PALTB

PAF and PHF circuit breakers can be bus or cable connected. For cable connections, optional terminal pad kit PALTB or equivalent bus structure is required. Each PALTB kit contains terminal pads for one end of the circuit breaker only and has provisions for mounting a maximum of six lugs per phase. Order lugs separately. See Pages 6-40 and 6-41.



PCF circuit breakers are supplied with terminal pads for both ends of the circuit breaker. The supplied terminal pads or equivalent bus structure must be used for bus or cable connections. Terminal pads have provisions for mounting a maximum of eight lugs per phase. Order lugs separately. See Pages 6-40 and 6-41.

N Frame – 1200 A, Thermal-Magnetic (600 Vac)

Continuous Current Rating @ 40° C	AC Magnetic Trip Settings▲		Standard Interrupting		Extra High Interrupting		Terminal Wire Range
	Low	High	Catalog Number	Price	Catalog Number	Price	
2-Pole, 600 Vac							
600	4000	8000	NAL26600	\$11024.	NCL26600	\$12694.	AL1200NE6 4-#3/0 AWG-600 kcmil
700	4000	8000	NAL26700	11024.	NCL26700	12694.	
800	4000	8000	NAL26800	11024.	NCL26800	12694.	
900	5000	10000	NAL26900	11024.	NCL26900	12694.	
1000	5000	10000	NAL261000	11024.	NCL261000	12694.	
1200	5000	10000	NAL261200	11024.	NCL261200	12694.	
3-Pole, 600 Vac							
600	4000	8000	NAL36600	\$12094.	NCL36600	\$13620.	AL1200NE6 4-#3/0 AWG-600 kcmil
700	4000	8000	NAL36700	12094.	NCL36700	13620.	
800	4000	8000	NAL36800	12094.	NCL36800	13620.	
900	5000	10000	NAL36900	12094.	NCL36900	13620.	
1000	5000	10000	NAL361000	12094.	NCL361000	13620.	
1200	5000	10000	NAL361200	12094.	NCL361200	13620.	

P Frame – 2000 and 2500 A, Thermal-Magnetic (600 Vac)

Ampere Rating	AC Magnetic Trip Settings▲		2-pole – 600 Vac				3-pole – 600 Vac				Total Price†	
	Low	High	Frame Only		Rating Columns Two Per Kit		Total Price†	Frame Only		Rating Columns Three Per Kit		
			Catalog No.	Price	Kit Catalog No.	Kit Price		Catalog No.	Price	Kit Catalog No.		Kit Price

2000 Ampere Frame

PAF Standard Interrupting – Complete Circuit Breaker Requires Frame and Rating Columns

600	3200	9000			PA2600RC	\$232.			PA3600RC	\$350.		
700	3200	9000			PA2700RC	232.			PA3700RC	350.		
800	3200	9000			PA2800RC	232.			PA3800RC	350.		
1000	3500	9000			PA21000RC	232.			PA31000RC	350.		
1200	3500	9000	PAF2026	\$10809.	PA21200RC	232.	\$11041.	PAF2036	\$13855.	PA31200RC	350.	\$14205.
1400	4500	9000			PA21400RC	232.			PA31400RC	350.		
1600	5000	10000			PA21600RC	232.			PA31600RC	350.		
1800	6500	11000			PA21800RC	232.			PA31800RC	350.		
2000	8000	12000			PA22000RC	232.			PA32000RC	350.		

PHF High Interrupting – Complete Circuit Breaker Requires Frame and Rating Columns

600	3200	9000			PA2600RC	\$232.			PA3600RC	\$350.		
700	3200	9000			PA2700RC	232.			PA3700RC	350.		
800	3200	9000			PA2800RC	232.			PA3800RC	350.		
1000	3500	9000			PA21000RC	232.			PA31000RC	350.		
1200	3500	9000	PHF2026	\$12397.	PA21200RC	232.	\$12629.	PHF2036	\$15347.	PA31200RC	350.	\$15697.
1400	4500	9000			PA21400RC	232.			PA31400RC	350.		
1600	5000	10000			PA21600RC	232.			PA31600RC	350.		
1800	6500	11000			PA21800RC	232.			PA31800RC	350.		
2000	8000	12000			PA22000RC	232.			PA32000RC	350.		

2500 Ampere Frame

PCF High Interrupting – Complete Circuit Breaker Requires Frame and Rating Columns

1600	6000	12000			PC21600RC	\$232.			PC31600RC	\$350.		
1800	6000	12000			PC21800RC	232.			PC31800RC	350.		
2000	6000	12000	PCF2526	\$19945.	PC22000RC	232.	\$20177.	PCF2536	\$24655.	PC32000RC	350.	\$25005.
2500	8000	14000			PC22500RC	232.			PC32500RC	350.		

† Price does not include lugs. See Pages 6-40 and 6-41 for catalog numbers and prices.
 ▲ UL magnetic trip setting tolerances are ±25% (Low) and ±20% (High) from the nominal values shown.

Interrupting Ratings (kA)

	NAL	NCL	PAF	PHF	PCF
240 V	100	125	65	125	125
480 V	50	100	50	100	100
600 V	25	65	42	65	65

Accessories	Pages 6-37–6-39
Optional Lugs	Pages 6-40, 6-41
Dimensions	Page 6-45, 6-46
Enclosures	Pages 6-47–6-50
Catalog Numbering System	Page 6-23

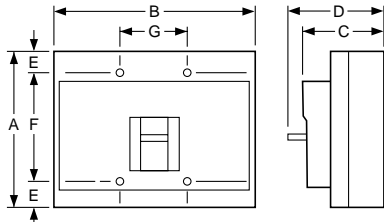


Figure 27




Figure 28

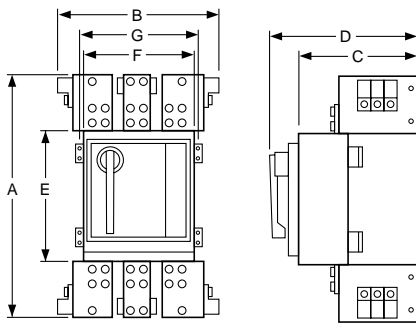


Figure 29




Figure 30




Figure 31




Figure 32





Figure 33




Figure 34




Figure 35





Figure 36

LC, LI, LE, LX, LXI, NA, NE, NX, PA, PC, PE, and PX Circuit Breakers

Circuit Breaker Catalog No. Prefix	No. Poles	Fig. No.	Dimensions - Inches						
			A	B	C	D	E	F	G
LC, LI, LE, LX, LXI	2 & 3	27	11.86	7.50	5.48	6.74	0.55	10.75	2.50
NA, NC, NX, NE	2 & 3	27	12.12	14.98	6.40	8.07	1.69	8.75	5.00
PA, PH, PX, PE	2 & 3	28	20.06	13.70	7.25	10.47	14.00	12.00	12.75
PC, PX-25, PE-20-25	2 & 3	29	26.10	23.30	13.33	16.55	14.10	12.00	...

ED, EG, EJ, KD, KG and GJ Circuit Breakers

Circuit Breaker Catalog No. Prefix	No. of Poles	Fig. No.	Dimensions — Inches				
			A	B	C	D	E
ED, EG, EJ	1	30	0.98	5.66	3.09	4.05	3.32
	2	31	1.96	5.66	3.09	4.05	3.32
	3	32	2.94	5.66	3.09	4.05	3.32
KD, KG	2, 3	33	4.12	7.35	3.20	4.17	3.34
GJ	3	34	3.54	4.72	2.76	3.94	2.20

MG, MJ, PG, PJ, PL, RG, RJ and RL Circuit Breakers

Circuit Breaker Catalog No. Prefix	No. of Poles	Fig. No.	Dimensions — Inches						
			A	B	C	D	E	F	G
MG, MJ	2, 3	35	12.40	8.27	5.53	8.05	2.28	7.87	7.87
PG, PJ, PL	2, 3	35	16.29	8.27	5.53	8.05	4.19	7.87	7.87
RG, RJ, RL	2, 3	36	15.00	16.54	6.30	14.38	8.73	14.25	15.35

Frame Size	Approx. Shipping Weight (Lbs.)	Frame Size	Approx. Shipping Weight (Lbs.)
ED, EG, EJ 1-pole	2	MAL	
ED, EG, EJ 2-pole	3	MHL	34
ED, EG, EJ 3-pole	4	MXL	
FAL		MEL	44
FHL 1-pole	2	NAL	
FHL 2-pole	3	NCL	49
FHL 3-pole	5	MG	
FCL		MJ	24
FIL	8	NXL	
GJ	3	NEL	65
KD		PAF	
KG	5	PHF	69
KAL		PG	
KHL	7	PJ	
KCL		PL	32
KIL	9	PXF	
LAL		PEF	80
LHL	15	RG	
LEL		RJ	
LCL		RL	52
LIL		Q2L	4
LXL	25	Q4L	15

All weights are for 3-pole circuit breakers unless otherwise noted.

