

# Combination Service Entrance Devices

Rainproof – Single Phase, Meter-Mains  
Class 4119/4120

**Square D**  
www.squared.com  
FOR CURRENT INFORMATION

## Meter-Mains

- Meets Federal Specification W-P-115c as Type 1, Class 2
- 120/240 Vac, 1-Phase, 3-Wire, NEMA Type 3R enclosure.
- UL Listed, suitable only for use as service equipment.

LOAD CENTERS

RING TYPE	Ampere Rating	By-pass Type	Service (Type of Feed)		Short Circuit Current Rating	Catalog Number	List Price (DE3A)	Service Disconnect(s)			Load Center, and Branch Circuit Breakers (Order separately pages 1-2, 1-3 or 1-10)			Hub Type (Order separately from page 1-18)	Line Side Main Lugs AWG/kcmil (Al/Cu)	Service Ground Lug AWG/kcmil (Al/Cu)	Weight Each (Lbs) and Pallet Qty.	
			UL	UL & EUSERC				2-Pole Circuits (Max.)	Type (Order Separately from page 1-18 except as noted)	Ampere Rating (Max.)	Max. Quantity							
											Spaces	1-Pole Circuits	Tandems					Ampere Rating (Max.)
RING TYPE	<b>Surface Mount only</b>																	
	100	None	OH/UG	...	10k	CQRB100	\$ 353.	1	QOM100▽■	125	.....	.....	.....	B	#4-1/0	#8-1/0	15, 54	
	125	None	OH/UG	...	10k	C125RB	223.	1	QOM1-VH	125	.....	.....	.....	B	#4-1/0	#8-1/0	15, 54	
	200	None	OH/UG	...	22k	CQRB200†	922.	1	QOM2200VH■	200	.....	.....	.....	B	#4-250	(2) #8-2/0	26, 24	
			OH/UG	...	22k	C200RB	619.	1	QOM2-VH	200	.....	.....	.....	B	#4-250	(2) #8-2/0	26, 24	
			OH/UG	...	22k	C2M200RB	656.	1	QOM2-VH QO-VH	200 50	.....	.....	.....	B	#4-250	(2) #8-2/0	27, 20	
			OH/UG	...	10k	C4L200RB	693.	2	QO	100	.....	.....	.....	B	#4-250	(2) #8-2/0	27, 28	
	<b>Surface Mount, convertible to Semiflush with SU400F flange kit (order separately)</b>																	
	400	Class 320 None	UG	UG	22k	CU12L400N□★	2309.	1 4	Q2L2200H■ Q2L-H QO-VH	200 200 100	.....	.....	.....	A-L	(2) Studs	#4-250	96, 6	
	400	Test Block Class 320	UG	...	22k	CU12L400B□★	2415.	1 4	Q2L2200H■ Q2L-H QO-VH	200 200 100	.....	.....	.....	A-L	(2) Studs	#4-250	96, 6	
HOMELINE	<b>Surface Mount only</b>																	
	125	None	OH/UG	OH/UG	10k	SC8L125S	513.	4	HOM	125	.....	.....	.....	A	#6-2/0	#12-1/0	27, 32	
	200	None	OH/UG	OH/UG	10k	SC12L200C†	860.	6	HOM	100	.....	.....	.....	A or B300	#6-300	#12-1/0	45, 18	
	<b>Semiflush Mount only</b>																	
	125	None	OH/UG	OH/UG	10k	SC8L125F	513.	4	HOM	125	.....	.....	.....	A	#6-2/0	#12-1/0	38, 24	
	200	None	OH/UG	OH/UG	10k	SC12L200F	860.	6	HOM	100	.....	.....	.....	A or B300	#6-300	#12-1/0	45, 18	
	<b>Surface Mount, convertible to Semiflush with SC200F flange kit (order separately) Supplied with Feed Thru Lugs and provisions for Branch Circuit Breakers</b>																	
	200	None	OH/UG	OH/UG	10k	SC816F150C◆	719.	1	HOM2150■	150	8	16	8	100	A or B300	#6-300	#12-1/0	48, 18
						SC816D150C◆	757.	1	HOM2150■	150	8	16	8	100				
						SC816F200C◆	719.	1	HOM2200■	200	8	16	8	100				
SC816D200C◆						757.	1	HOM2200■	200	8	16	8	100					
RINGLESS	<b>Surface Mount Only</b>																	
	200	None	OH/UG	.....	22k	QC12L200C●	946.	6	QO-VH	100	.....	.....	.....	A	#6-350	#12-2/0	40, 21	
	200	Horn	OH/UG	.....	22k	QC12L200CH●△▽	1141.	6	QO-VH	100	.....	.....	.....	A	#6-350	#12-2/0	40, 21	
	<b>Surface Mount Only, Supplied with Feed Thru Lugs and provisions for Branch Circuit Breakers</b>																	
	100	Horn	OH/UG	.....	22k	QC816F100CH●◆△	822.	1	QOM2100VH■	100	8	16	8	100	A	#6-350	#12-2/0	40, 21
						QC816F125C●◆	790.	1	QOM2125VH■	125	8	16	8	100				
						QC816F125CH●◆△	822.	1	QOM125VH■	125	8	16	8	100				
						QC816F150C●◆	790.	1	QOM2150VH■	150	8	16	8	100				
						QC816F150CH●◆△	822.	1	QOM2150VH■	150	8	16	8	100				
						QC816F200C●◆	822.	1	QOM2200VH■	200	8	16	8	100				
200	Horn	OH/UG	.....	22k	QC816F200CH●◆△	822.	1	QOM2200VH■	200	8	16	8	100	A	#6-350	#12-2/0	40, 21	
					QC816F100CH●◆△	822.	1	QOM2100VH■	100	8	16	8	100					
					QC816F125CH●◆△	822.	1	QOM125VH■	125	8	16	8	100					
					QC816F150CH●◆△	822.	1	QOM2150VH■	150	8	16	8	100					
					QC816F200CH●◆△	822.	1	QOM2200VH■	200	8	16	8	100					
					QC816F150CH●◆△	822.	1	QOM2150VH■	150	8	16	8	100					
<b>Surface Mount, convertible to Semiflush with SU400F flange kit (order separately)</b>																		
400	Class 320 Lever	UG	UG	22k	CU12L400L★	2309.	1 4	Q2L2200H■ Q2L-H QO-VH	200 200 100	.....	.....	.....	A-L	(2) Studs	#4-250	96, 6		
HOMELINE	<b>Surface Mount Only</b>																	
	125	None	OH/UG	OH/UG	10k	RC8L125S	513.	4	HOM	125	.....	.....	.....	A	#6-2/0	#12-1/0	27, 32	
	200	None	OH/UG	.....	10k	RC12L200C●	860.	6	HOM	100	.....	.....	.....	A	#6-350	#12-2/0	40, 21	
	200	Horn	OH/UG	.....	10k	RC12L200CH●△▽	860.	6	HOM	100	.....	.....	.....	A	#6-350	#12-2/0	40, 21	
	<b>Surface Mount Only, Supplied with Feed Thru Lugs</b>																	
	100	Horn	OH/UG	.....	22k	RC816F100CH●◆△	744.	1	QOM2100VH■	100	8	16	8	100	A	#6-350	#12-2/0	40, 21
						RC816F125CH●◆△	744.	1	QOM2125VH■	125	8	16	8	100				
						RC816F150C●◆	719.	1	QOM2150VH■	150	8	16	8	100				
						RC816F150CH●◆△	744.	1	QOM2150VH■	150	8	16	8	100				
						RC816F200C●◆	744.	1	QOM2200VH■	200	8	16	8	100				
RC816F200CH●◆△						744.	1	QOM2200VH■	200	8	16	8	100					

■ Service Disconnect Supplied Factory Installed.  
 □ For use only on 120/240 Vac, 1-Phase, 3-Wire system.  
 ▽ Supplied with horn bypass and 5th. Jaw factory installed.  
 ▽ Order Type QOM1-VH replacement circuit breaker (10k).  
 ★ Knockout provided in cover for use with Barrel Lock Kit, order catalog number SCBRLOCK (see Accessories page 1-18).  
 ● Device supplied with Barrel Lock provisions factory installed.  
 ◆ Supplied with load side feed thru lugs, for #4 AWG-250 kcmil (Al/Cu) conductors.  
 † Convertible to semiflush with SC200F flange kit (order separately).  
 ● 125 A HOMELINE 2-Pole circuit breaker can be installed in top position only. All other positions are limited to 100 A max.  
 ▼ Not stocked in PDS, contact Lexington for delivery.  
 ‡ Consumer product only (same as C200RB).

# Combination Service Entrance Devices

Circuit Breakers, Accessories

Class 4119/4120

**Square D**

www.squared.com

FOR CURRENT INFORMATION

## Circuit Breakers

For use with Meter Mains and All-In-One devices

Ampere Rating ■	Type: HOM, 1-Pole		Type: HOM, 2-Pole		Type: QO, 1-Pole		Type: QO, 2-Pole		Type: QO-VH, 1-Pole		Type: QO-VH, 2-Pole	
	Catalog Number	Price (DE3D)	Catalog Number	Price (DE3D)	Catalog Number	Price (DE2A)	Catalog Number	Price (DE2A)	Catalog Number	Price (DE2A)	Catalog Number	Price (DE2A)
10	...	...	...	...	QO110	\$19.40	...	...	...	...	...	...
15	HOM115	\$17.50	...	...	QO115	19.40	...	...	QO115VH	\$40.30	...	...
20	HOM120	17.50	...	...	QO120	19.40	...	...	QO120VH	40.30	...	...
25	HOM125	17.50	...	...	QO125	19.40	...	...	QO125VH	46.20	...	...
30	HOM130	17.50	HOM230	\$ 40.30	QO130	19.40	QO230	\$ 44.70	QO130VH	46.20	QO230VH	\$ 92.00
35	...	...	HOM235	40.30	QO135	19.40	QO235	44.70	...	...	...	...
40	HOM140	17.50	HOM240	40.30	QO140	19.40	QO240	44.70	...	...	QO240VH	92.00
45	...	...	HOM245	40.30	QO145	19.40	QO245	44.70	...	...	...	...
50	HOM150	17.50	HOM250	40.30	QO150	19.40	QO250	44.70	...	...	QO250VH	92.00
60	...	...	HOM260	40.30	QO160	19.40	QO260	44.70	...	...	QO260VH	92.00
70	...	...	HOM270	82.00	QO170	44.70	QO270	89.00	...	...	QO270VH	142.00
80	...	...	HOM280	112.00	...	...	QO280	126.00	...	...	QO280VH	200.00
90	...	...	HOM290	112.00	...	...	QO290	126.00	...	...	QO290VH	200.00
100	...	...	HOM2100	112.00	...	...	QO2100	126.00	...	...	QO2100VH	200.00
Ampere Rating ■	Type: QOM1-VH, 2-Pole			Type: QOM2-VH, 2-Pole			Type: Q2L-H, 2-Pole					
	Catalog Number	Price (DE3A)		Catalog Number	Price (DE3A)		Catalog Number	Price (DE2A)				
50	QOM50VH▲	\$ 89.00		...	...		...	...				
60	QOM60VH	89.00		...	...		...	...				
70	QOM70VH	89.00		...	...		...	...				
80	QOM80VH	128.00		...	...		...	...				
90	QOM90VH	128.00		...	...		...	...				
100	QOM100VH	128.00		QOM2100VH	\$297.00		Q2L2100H	\$726.00				
110	QOM110VH	297.00		...	...		Q2L2110H	726.00				
125	QOM125VH	297.00		QOM2125VH	297.00		Q2L2125H	726.00				
150	...	...		QOM2150VH	297.00		Q2L2150H	726.00				
175	...	...		QOM2175VH	297.00		Q2L2175H	726.00				
200	...	...		QOM2200VH	297.00		Q2L2200H	726.00				
225	...	...		QOM2225VH	297.00		...	...				

- Do not exceed mains rating of device
- ▲ Reference National Electrical Code Article 230-79.

## Accessories

Description	Catalog Number	Price	Disc. Sch.
Generator Kit: Interlocks main service disconnect and generator circuit breaker (order separately). For use on: HOMELINE CSED Devices RC816F-, RC2040M-QO CSED Devices QC816F-, QC2040M-	RCGK2	\$148.00	(DE3A)
Fifth Jaw Kit for: Meter Main Types: C, RC, SC, QC All-In-One Types: SC, SU (100-225A), QC, RC	5J	11.60	(DE3A)
Fifth Jaw Kit (9:00 position) for: CU12L400L, SU3040D300L, and SU3040D400L	35815SPL	38.50	(DE3A)
Bypass (Horn Type) for: Ringless Type Meter Mains and All-In-Ones (100-200 A)	RCHB2	58.00	(DE3A)
Lexan Meter Socket Cover Plate for: Ring and Ringless Type Meter Mains Ring and Ringless Type All-In-Ones	29007	6.40	(DE4)
Meter Socket Sealing Rings for Ring Type Meter Mains and All-In-Ones: Screw Type Aluminum Snap Type Stainless Steel Latch Type Stainless Steel	29008W 29209-100-02▼ 29008G	12.80 10.60 12.80	(DE4)
Trim Kit for 2" X 6" stud wall, used with: REVERSE All-In-Ones, SU3040M200R, and SU3040M225R	SU2X6TRIM	161.00	(DE3A)
Barrel Lock Kit (Barrel Lock not included), supplied with bracket and mounting screw, refer to listings for where used.	SCBRLLOCK	32.10	(DE3A)
Semiflush Flange Kit for: Ring Type Convertible Surface/Semiflush Meter Mains (125-200 A) All-In-Ones (125-200 A) Ringless Type Convertible Surface/Semiflush Meter Mains (125-200 A)	SC200F	19.30	(DE3A)
Semiflush Flange Kit for: Ring Type Convertible Surface/Semiflush Meter Mains (300-400 A) All-In-Ones (300-400 A) Ringless Type Convertible Surface/Semiflush All-In-Ones (300-400 A)	SU400F	119.00	(DE3A)
Ringless Type Utility Cover for use on: SU3040D300L, SU3040D400L, and CU12L400L. Includes one piece meter socket and pull box cover with handles and closing plate.	C400L	161.00	(DE3A)
Lug Kit includes (4) lugs, for use with #2 AWG-600 kcmil Al/Cu conductors. Lugs are for standard 2-Hole mounting. Meter Main and All-In-One units supplied with (2) Studs per phase and neutral will accept one lug per phase and neutral	CMECLK4	87.00	(DE4A)

▼ Order only. Not stocked in PDS. Order Point: Lexington.

## Accessories

Description	Catalog Number	Price	Disc. Sch.
Touch-Up Paint (ASA49 Gray)	PK49SP	\$24.80	(DE1)
Ground Bar Kit QC, SC, RC, and SU (100-225 A) SC3040M200RS and SC40M200S	PK15GTA PK23GTA	10.90 13.50	(DE3A) (DE3A)
Filler Plate for: Meter Main Types: QC, CU All-In-One Types: QC	QOFP	2.30	(DE3A)
Filler Plate for: Meter Main Types: RC, SC All-In-One Types: SC, RC, SU	HOMFP	2.00	(DE3A)
Neutral Lug (#6-2/0) for: Meter Main Types: RC, SC, QC All-In-One Types: SC, SU, QC, RC	LK100AN	6.90	(DE3A)


## Hubs and Closing Plates

Hub Series	Conduit Size (inches)	Catalog Number	List Price	Disc. Sch.
Closing Plate for "A" Hub opening		ACP	\$ 8.50	(DE4)
A	1.00	A100	21.50	(DE4)
	1.25	A125	21.50	(DE4)
	1.50	A150	21.50	(DE4)
	2.00	A200	30.40	(DE4)
	2.50	A250	38.50	(DE4)
Adapter plate to allow use of "A" Hubs on "A-L" size hub openings		AAP	21.40	(DE4)
Closing Plate for "A-L" Hub opening		ACPL	11.60	(DE4)
A-L	2.00	A200L ☆	52.00	(DE4)
	2.50	Order A250 + AAP	...	...
	3.00	A300L	70.00	(DE4)
	3.50	A350L	72.00	(DE4)
Closing Plate for "B" Hub opening		BCAP	2.40	(DE1A)
B	0.75	B075	22.20	(DE1A)
	1.00	B100	22.20	(DE1A)
	1.25	B125	22.20	(DE1A)
	1.50	B150	22.20	(DE1A)
	2.00	B200	40.90	(DE1A)
	2.50	B250	68.00	(DE1A)
B300	3.00	B300	124.00	(DE1A)

☆ Supplied with AAP adapter plate and "A" hub

DE1	DE1A	DE2A	DE3A	DE3D	DE4	DE4A
-----	------	------	------	------	-----	------



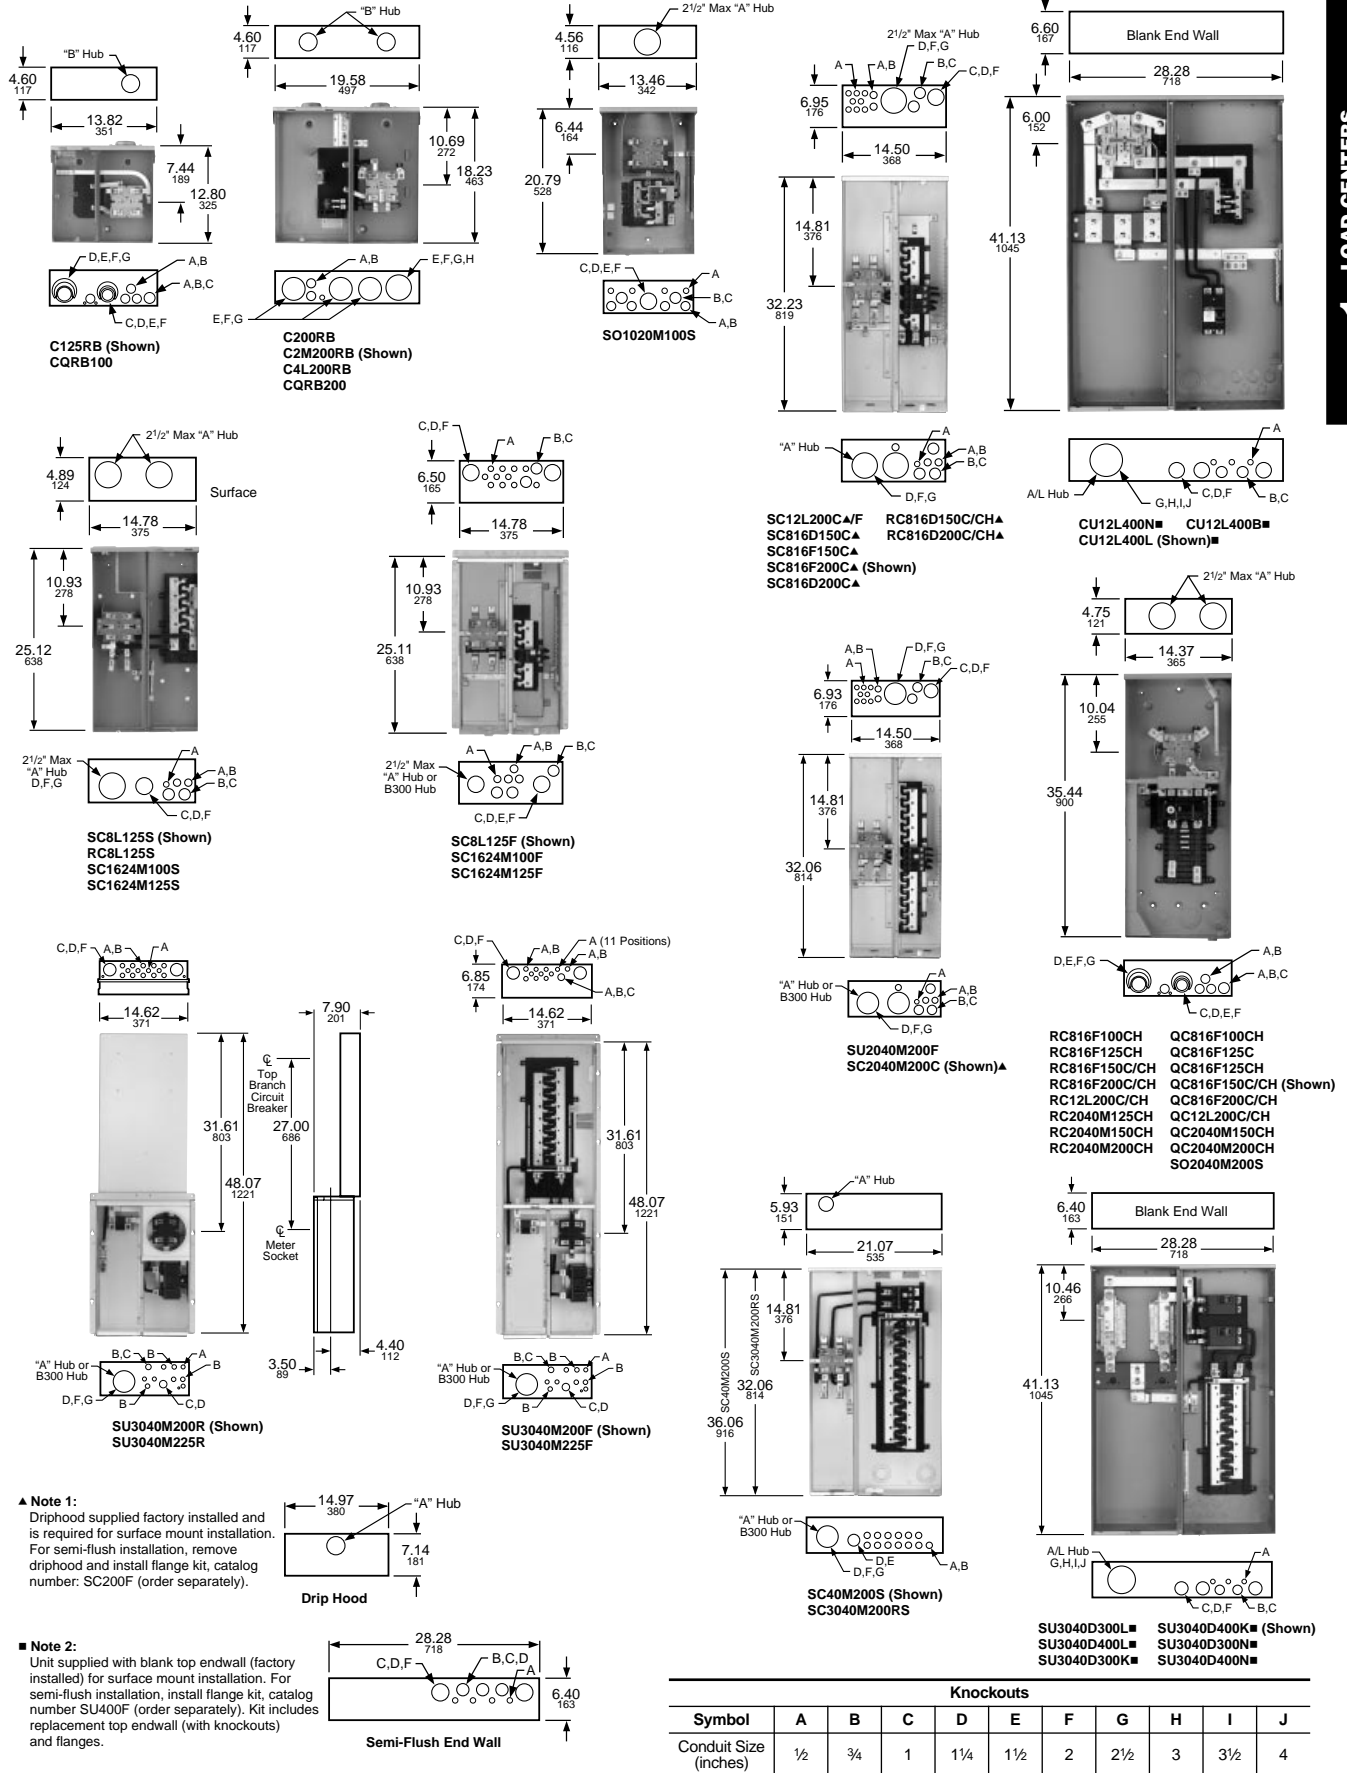

Knockouts										
Symbol	A	B	C	D	E	F	G	H	I	J
Conduit Size (inches)	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4